

DATE: 2013-8-20 (YY/MM/DD)

Customer :

APPROVAL SHEET

PRODUCT: AC ADAPTOR(ROHS COMPLIANT)

MODEL: APS305-7508

PART NO. ST-0017


V : A1

Receiver's stamp or signature

PLEASE APPROVE & RETURN BEFORE 2013-9-3
OR WE WOULD REGARD IT BEEN CONFIRMED.

RESPONSIBLE	APPROVED	ISSUED
		<i>nishuan</i>

ISSUES STAMP



Revised History

NO.	Revised Date	Description	Approved	Issued



Anthin Power Supply Co.,Ltd. (China)

TEL:+86-755-8980-7888

FAX:+86-755-8980-1111

<http://www.Anthin.cn>

info@anthin.cn

Anthin Japan Co.,Ltd. (Japan)

TEL:+81-45-730-5250

FAX:+81-45-730-5251

<http://www.Anthin.co.jp>

info@anthin.co.jp

Anthin	DESCRIPTION	SWITCHING POWER AC ADAPTER	SHEET NO.	1 OF 4
			VER:	A1
	MODEL NO.	APS305-7508	PART NO.	ST-0017

1.INPUT REQUIREMENT

2.OUTPUT SPECIFICATION

3.MECHANICAL

4.RELIABILITY

5.ENVIRONMENT

6.OUTLOOKING

7.SAFETY

8.QC CHECK

9.DIMENSION

10.LABEL

11.PACKING

Anthin	DESCRIPTION	SWITCHING POWER AC ADAPTER	SHEET NO.	2 OF 4
	MODEL NO.	APS305-7508	VER:	A1
			PART NO.	ST-0017


1.INPUT REQUIREMENT

ITEM	SPECIFICATION	MIN	TYP.	MAX
NORMAL AC INPUT VOLTAGE	SINGLE PHASE	100Vac	110Vac/220Vac	240Vac
AC INPUT VOLTAGE RANGE	SINGLE PHASE	90Vac	110Vac/220Vac	264Vac
AC INPUT FREQUENCY	SINGLE PHASE	47Hz	50/60Hz	63Hz
AC INPUT CURRENT	TYPICAL INPUT VOLTAGE& OUTPUT AT FULL LOAD.			150mA
AC INRUSH CURRENT	TYPICAL INPUT VOLTAGE& OUTPUT AT FULL LOAD , 25°C.			30A
EFFICIENCY	TYPICAL INPUT VOLTAGE& OUTPUT AT FULL LOAD	65%		

2.OUTPUT SPECIFICATION

ITEM	SPECIFICATION	MIN	TYP.	MAX
NORMAL DC OUTPUT VOLTAGE			7.5Vdc	
DC OUTPUT VOLTAGE RANGE	TYPICAL OUTPUT VOLTAGE $\pm 5\%$	7.1V		7.9V
LOAD CURRENT RANGE		0A		0.8A
PEAK LOAD CURRENT	TIME<60S			1.1A
RIPPLE	TYPICAL INPUT VOLTAGE , TYPICAL LOAD CURRENT , 25°C			100mV
HOLD-UP TIME	AT TYPICAL INPUT VOLTAGE AND FULL LOAD	10mS		
TURN-ON DELAY	TYPICAL INPUT VOLTAGE AND TUP LOAD CURRENT			1S
OVER CURRENT PROTECTION	AUTO RECOVERY			
SHORT CIRCUIT PROTECTRON	THE ADAPTER SHALL NOT DAMAGE BY SHORT THE DC OUTPUT TO GROUND			
OVER VOLTAGE PROTECTION			8.7V	10V

*TEST MEASURES

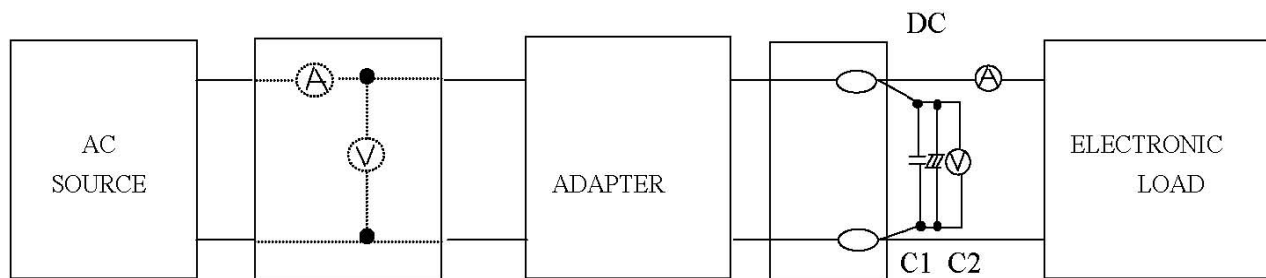

C1: 0.1uF CERAMICS CAPACITOR
C2: 10uF 50V ALUMINUM CAPACITOR

Anthin	DESCRIPTION	SWITCHING POWER AC ADAPTER	SHEET NO.	3 OF 4
	MODEL NO.	APS305-7508	VER:	A1
			PART NO.	ST-0017

3.MECHANICAL


ITEM	SPECIFICATION OR TEST CONDITION	ACCEPTANCE CRITERIA
BENDING TEST	NORMAL TEMPERATURE THE CORD SHALL WITHSTAND WEIGHT OF 200g, SWINGING FROM LEFT TO RIGHT AT AN ANGLE OF 60 DEG. 1000CYCLE TIMES MIN. S/R SHALL WITHSTAND WEIGHT OF 1N. SWINGING FROM LEFT TO RIGHT AT AN ANGLE OF 60DEG. 1000CYCLE TIMES MIN. BENDING SPEED 40CYCLE/MINUTE	NO SHORT CIRCUIT NO BREAKAGE OF THE CORD
VIBRATION	FREQUENCY RANGE:10~55Hz AMPLITUDE:1.5mm ACCELERATION: 1G SWEEP 1 MINUTE FOR X,Y,Z,AXIS EACH	THERE SHALL BENO ABNORMALITY ON THE APPEARANCE STRUCTURE AND OPERATING



4.RELIABILITY

ITEM	TEST CONDITION	ACCEPTANCE CRITERIA
TEMPERATURE UP WITH TYPICAL LOAD	TEST THE SURFACE OF THE CASE WITH TYPICAL LOAD OUTPUT AND TYPICAL AC INPUT 50/60Hz	TEMPERATURE UP UNDER 35 DEGREES
HI-POT TEST	INPUT TO OUTPUT GRADUALLY RAISED FROM 0 TO THE 3000Vac AND HELD AT THAT VALUE FOR 3S,5mA	NO DAMAGE
INSULATION RESISTANCE	INPUT TO OUTPUT,DC 500V	>100MΩ
MTBF	TYPICAL INPUT&FULL LOAD , 25℃	50000 HOURS
LIFE	TYPICAL INPUT&FULL LOAD, 40℃ TYPICAL INPUT&FULL LOAD, 25℃	1YEARS ABOVE 2YEARS ABOVE
BURN-IN	AT 30℃(±10℃),NORMAL INPUT VOLTAGE	2~4 HOURS

5.ENVIRONMENT


ITEM	SPECIFICATION OR TEST CONDITION	min.	typ.	max.
OPERATING TEMPERATURE		0℃		40℃
STORAGE TEMPERATURE		-20℃		85℃
OPERATING HUMIDITY	NON-CONDENSING	5%RH		90%RH
STORAGE HUMIDITY	NON-CONDENSING	5%RH		90%RH

Anthin	DESCRIPTION	SWITCHING POWER	SHEET NO.	4 OF 4		
		AC ADAPTER	VER:	A1		
	MODEL NO.	APS305-7508	PART NO.	ST-0017		
6.OUTLOOKING						
DIMENSION :46(L)X33.2(W)X21.2(H)mm WEIGHT :ABOUT 50g AC INPUT TYPE :WALL MOUNT DC OUTPUT TYPE :5.5*2.1*9.5 S TYPE <div style="text-align: center;">  </div>						
DC OUTPUT CABLE :USE UL 2468 22AWG WIRE ROHS COMPLIANT INDICATION :LABEL ROHS COMPLIANT CASE MATERIAL :94V-0 ABS+PC BLACK ROHS COMPLIANT PCB MATERIAL :94V-0 ROHS COMPLIANT						
7.SAFETY						
COMPLY SAFETY STANDARDS		STANDARD	FILE NO.			
UL CUL						
PSE						
<table border="1" style="margin: auto;"> <tr> <td>EMI</td> </tr> <tr> <td>FCC</td> </tr> </table>					EMI	FCC
EMI						
FCC						
8.QC CHECK						
ALL OF THE QUANTITY SHALL BE CHECKED BEFORE SHIPMENT, CHECK ITEM AS BELOW:						
(1)DC PLUG POLE CHECK						
(2)OCP FUNCTION CHECK						
(3)DC OUTPUT VOLTAGE CHECK						
(4)HIPOT&INSULATION CHECK						
(5)OUTLOOKING CHECK						

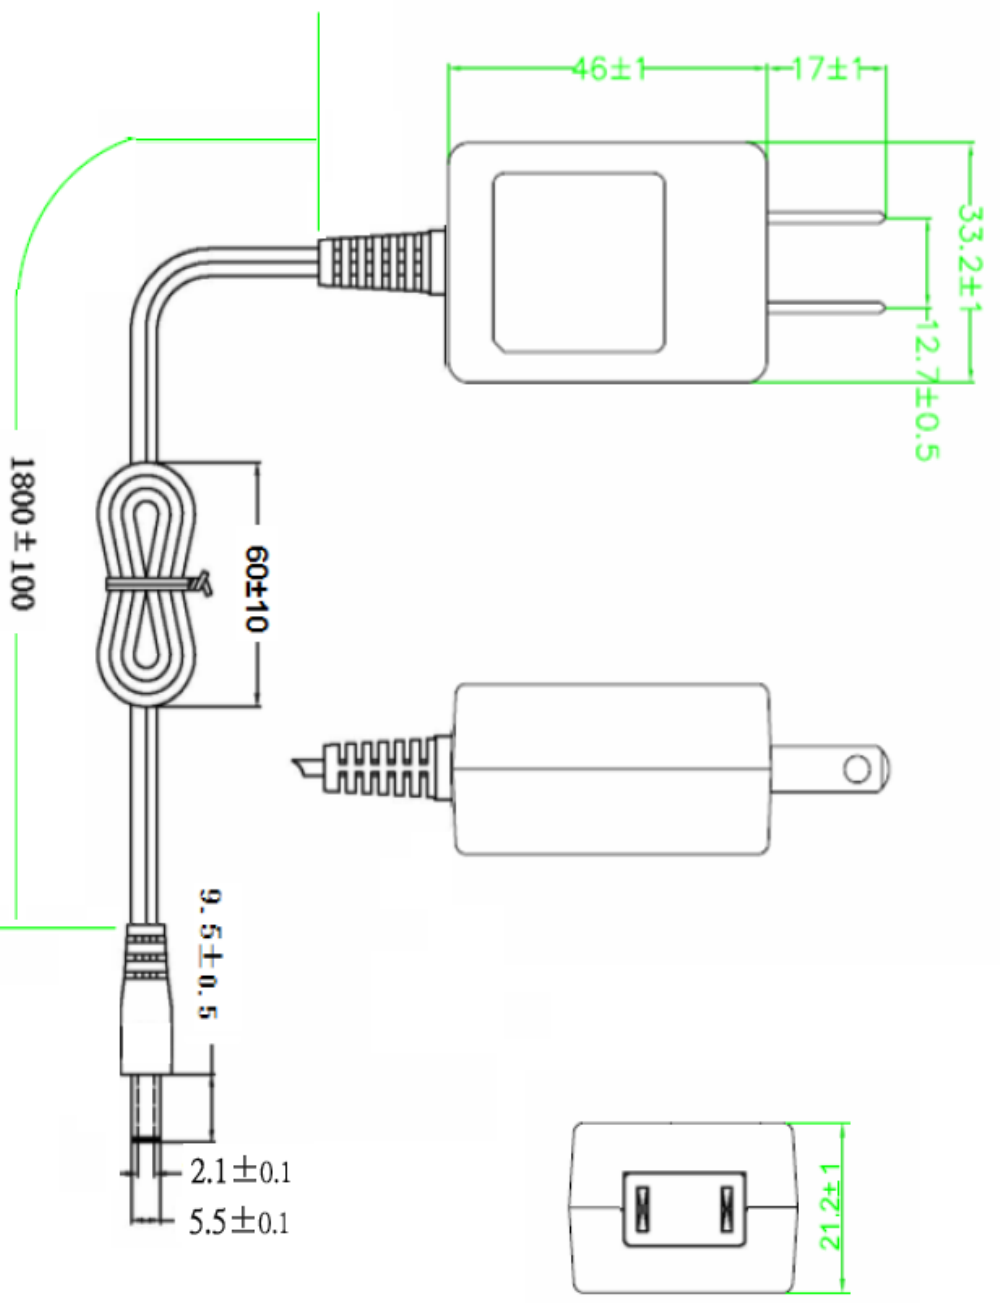

TOLERANCE		FINISH		UNIT	REV.	NAME	
1st	2nd	3rd	4th				XXX
1.61	±0.05	±0.08	±0.1	±0.2	±0.3	±0.4	XXXXXX
1.61	±0.05	±0.1	±0.2	±0.3	±0.4	±0.5	XXXXXX
1.61	±0.1	±0.2	±0.3	±0.4	±0.5	±0.6	XXXXXX
1.61	±0.15	±0.25	±0.35	±0.45	±0.55	±0.65	XXXXXX
1.61	±0.2	±0.3	±0.4	±0.5	±0.6	±0.7	XXXXXX
1.61	±0.25	±0.35	±0.45	±0.55	±0.65	±0.75	XXXXXX
1.61	±0.3	±0.4	±0.5	±0.6	±0.7	±0.8	XXXXXX
1.61	±0.35	±0.45	±0.55	±0.65	±0.75	±0.85	XXXXXX
1.61	±0.4	±0.5	±0.6	±0.7	±0.8	±0.9	XXXXXX
1.61	±0.45	±0.55	±0.65	±0.75	±0.85	±0.95	XXXXXX
1.61	±0.5	±0.6	±0.7	±0.8	±0.9	±1.0	XXXXXX
1.61	±0.55	±0.65	±0.75	±0.85	±0.95	±1.05	XXXXXX
1.61	±0.6	±0.7	±0.8	±0.9	±1.0	±1.1	XXXXXX
1.61	±0.65	±0.75	±0.85	±0.95	±1.05	±1.15	XXXXXX
1.61	±0.7	±0.8	±0.9	±1.0	±1.1	±1.2	XXXXXX
1.61	±0.75	±0.85	±0.95	±1.05	±1.15	±1.25	XXXXXX
1.61	±0.8	±0.9	±1.0	±1.1	±1.2	±1.3	XXXXXX
1.61	±0.85	±0.95	±1.05	±1.15	±1.25	±1.35	XXXXXX
1.61	±0.9	±1.0	±1.1	±1.2	±1.3	±1.4	XXXXXX
1.61	±0.95	±1.05	±1.15	±1.25	±1.35	±1.45	XXXXXX
1.61	±1.0	±1.1	±1.2	±1.3	±1.4	±1.5	XXXXXX
1.61	±1.05	±1.15	±1.25	±1.35	±1.45	±1.55	XXXXXX
1.61	±1.1	±1.2	±1.3	±1.4	±1.5	±1.6	XXXXXX
1.61	±1.15	±1.25	±1.35	±1.45	±1.55	±1.65	XXXXXX
1.61	±1.2	±1.3	±1.4	±1.5	±1.6	±1.7	XXXXXX
1.61	±1.25	±1.35	±1.45	±1.55	±1.65	±1.75	XXXXXX
1.61	±1.3	±1.4	±1.5	±1.6	±1.7	±1.8	XXXXXX
1.61	±1.35	±1.45	±1.55	±1.65	±1.75	±1.85	XXXXXX
1.61	±1.4	±1.5	±1.6	±1.7	±1.8	±1.9	XXXXXX
1.61	±1.45	±1.55	±1.65	±1.75	±1.85	±1.95	XXXXXX
1.61	±1.5	±1.6	±1.7	±1.8	±1.9	±2.0	XXXXXX
1.61	±1.55	±1.65	±1.75	±1.85	±1.95	±2.05	XXXXXX
1.61	±1.6	±1.7	±1.8	±1.9	±2.0	±2.1	XXXXXX
1.61	±1.65	±1.75	±1.85	±1.95	±2.05	±2.15	XXXXXX
1.61	±1.7	±1.8	±1.9	±2.0	±2.1	±2.2	XXXXXX
1.61	±1.75	±1.85	±1.95	±2.05	±2.15	±2.25	XXXXXX
1.61	±1.8	±1.9	±2.0	±2.1	±2.2	±2.3	XXXXXX
1.61	±1.85	±1.95	±2.05	±2.15	±2.25	±2.35	XXXXXX
1.61	±1.9	±2.0	±2.1	±2.2	±2.3	±2.4	XXXXXX
1.61	±1.95	±2.05	±2.15	±2.25	±2.35	±2.45	XXXXXX
1.61	±2.0	±2.1	±2.2	±2.3	±2.4	±2.5	XXXXXX
1.61	±2.05	±2.15	±2.25	±2.35	±2.45	±2.55	XXXXXX
1.61	±2.1	±2.2	±2.3	±2.4	±2.5	±2.6	XXXXXX
1.61	±2.15	±2.25	±2.35	±2.45	±2.55	±2.65	XXXXXX
1.61	±2.2	±2.3	±2.4	±2.5	±2.6	±2.7	XXXXXX
1.61	±2.25	±2.35	±2.45	±2.55	±2.65	±2.75	XXXXXX
1.61	±2.3	±2.4	±2.5	±2.6	±2.7	±2.8	XXXXXX
1.61	±2.35	±2.45	±2.55	±2.65	±2.75	±2.85	XXXXXX
1.61	±2.4	±2.5	±2.6	±2.7	±2.8	±2.9	XXXXXX
1.61	±2.45	±2.55	±2.65	±2.75	±2.85	±2.95	XXXXXX
1.61	±2.5	±2.6	±2.7	±2.8	±2.9	±3.0	XXXXXX
1.61	±2.55	±2.65	±2.75	±2.85	±2.95	±3.05	XXXXXX
1.61	±2.6	±2.7	±2.8	±2.9	±3.0	±3.1	XXXXXX
1.61	±2.65	±2.75	±2.85	±2.95	±3.05	±3.15	XXXXXX
1.61	±2.7	±2.8	±2.9	±3.0	±3.1	±3.2	XXXXXX
1.61	±2.75	±2.85	±2.95	±3.05	±3.15	±3.25	XXXXXX
1.61	±2.8	±2.9	±3.0	±3.1	±3.2	±3.3	XXXXXX
1.61	±2.85	±2.95	±3.05	±3.15	±3.25	±3.35	XXXXXX
1.61	±2.9	±3.0	±3.1	±3.2	±3.3	±3.4	XXXXXX
1.61	±2.95	±3.05	±3.15	±3.25	±3.35	±3.45	XXXXXX
1.61	±3.0	±3.1	±3.2	±3.3	±3.4	±3.5	XXXXXX
1.61	±3.05	±3.15	±3.25	±3.35	±3.45	±3.55	XXXXXX
1.61	±3.1	±3.2	±3.3	±3.4	±3.5	±3.6	XXXXXX
1.61	±3.15	±3.25	±3.35	±3.45	±3.55	±3.65	XXXXXX
1.61	±3.2	±3.3	±3.4	±3.5	±3.6	±3.7	XXXXXX
1.61	±3.25	±3.35	±3.45	±3.55	±3.65	±3.75	XXXXXX
1.61	±3.3	±3.4	±3.5	±3.6	±3.7	±3.8	XXXXXX
1.61	±3.35	±3.45	±3.55	±3.65	±3.75	±3.85	XXXXXX
1.61	±3.4	±3.5	±3.6	±3.7	±3.8	±3.9	XXXXXX
1.61	±3.45	±3.55	±3.65	±3.75	±3.85	±3.95	XXXXXX
1.61	±3.5	±3.6	±3.7	±3.8	±3.9	±4.0	XXXXXX
1.61	±3.55	±3.65	±3.75	±3.85	±3.95	±4.05	XXXXXX
1.61	±3.6	±3.7	±3.8	±3.9	±4.0	±4.1	XXXXXX
1.61	±3.65	±3.75	±3.85	±3.95	±4.05	±4.15	XXXXXX
1.61	±3.7	±3.8	±3.9	±4.0	±4.1	±4.2	XXXXXX
1.61	±3.75	±3.85	±3.95	±4.05	±4.15	±4.25	XXXXXX
1.61	±3.8	±3.9	±4.0	±4.1	±4.2	±4.3	XXXXXX
1.61	±3.85	±3.95	±4.05	±4.15	±4.25	±4.35	XXXXXX
1.61	±3.9	±4.0	±4.1	±4.2	±4.3	±4.4	XXXXXX
1.61	±3.95	±4.05	±4.15	±4.25	±4.35	±4.45	XXXXXX
1.61	±4.0	±4.1	±4.2	±4.3	±4.4	±4.5	XXXXXX
1.61	±4.05	±4.15	±4.25	±4.35	±4.45	±4.55	XXXXXX
1.61	±4.1	±4.2	±4.3	±4.4	±4.5	±4.6	XXXXXX
1.61	±4.15	±4.25	±4.35	±4.45	±4.55	±4.65	XXXXXX
1.61	±4.2	±4.3	±4.4	±4.5	±4.6	±4.7	XXXXXX
1.61	±4.25	±4.35	±4.45	±4.55	±4.65	±4.75	XXXXXX
1.61	±4.3	±4.4	±4.5	±4.6	±4.7	±4.8	XXXXXX
1.61	±4.35	±4.45	±4.55	±4.65	±4.75	±4.85	XXXXXX
1.61	±4.4	±4.5	±4.6	±4.7	±4.8	±4.9	XXXXXX
1.61	±4.45	±4.55	±4.65	±4.75	±4.85	±4.95	XXXXXX
1.61	±4.5	±4.6	±4.7	±4.8	±4.9	±5.0	XXXXXX

DEG.	CHKD.	APPD.	SCALE	DWG NO.	REV.	PART NO.
Anni			SCALE	DWG NO.	XXXX	ST-0017

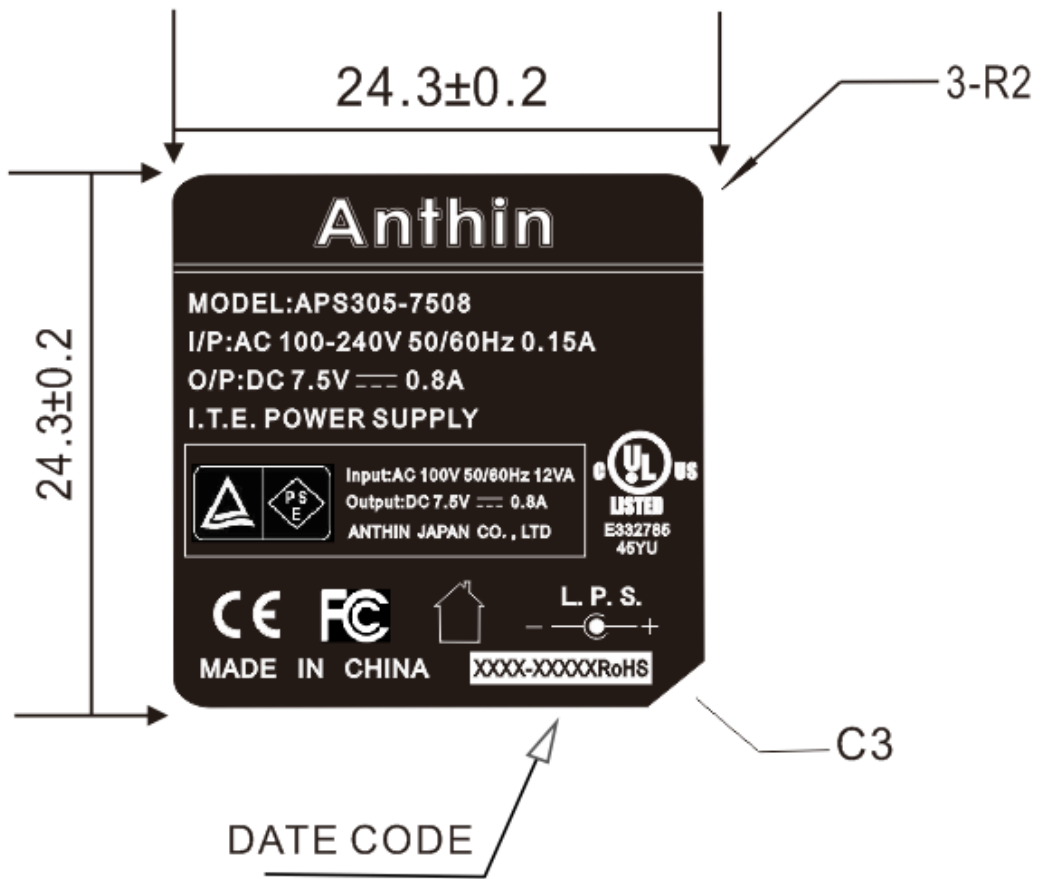


XXXX-XXXXRoHS



NOTE:



- 1.SILVER WORD(银字) ON BLACK BASE(黑底).
- 2.MATERIAL:PVC + MYLAR FILM
- 3.ROHS COMPLIANT.

TOLERANCE					FINISH	NAME: LABEL	
L ≤ 4	0.05	0.08	0.1	0.2		MATERIAL	QTY
4 < L ≤ 20	0.08	0.1	0.2	0.3			
20 < L ≤ 50	0.1	0.15	0.3	0.4			
50 < L ≤ 200	0.15	0.25	0.4	0.6			
200 < L	0.2	0.4	0.5	0.8			
DEG.	CHKD.	APPD.	UNIT	mm	SCALE	PART NO. ST-0017	
Anni			REF.				
			REM.				

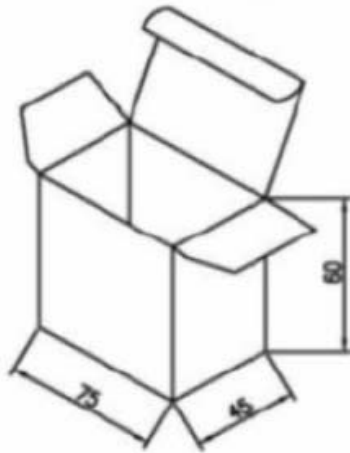


成品1PCS装入小白盒
 小白盒材质 (450G)
 外径尺寸:长*宽*高
 L*W*H (75*45*60mm)
 TOLERANCE : ±1

WHITE INNER BOX+OUT CARTON
 WHITE INNER BOX OUT SIDE DIMENSION :
 L*W*H (75*45*60mm)
 TOLERANCE : ±1

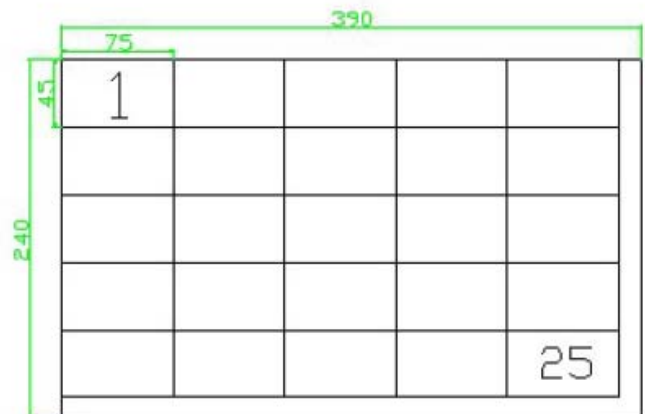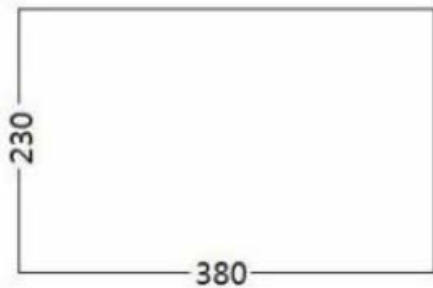

每层装25个小白盒，共可装4层。

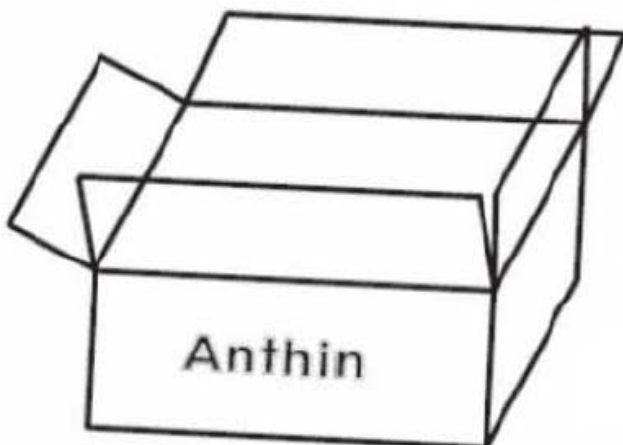

成品100PCS装入外箱
 外箱3段: K=A
 外径尺寸:长*宽*高
 L390*W240*H282mm
 平卡尺寸:长*宽
 L380*W230mm

TOLERANCE					FINISH			NAME	PACKING
L < 4	±0.05	±0.08	±0.1	±0.2					
4 < L < 20	±0.08	±0.1	±0.2	±0.3					
20 < L < 50	±0.1	±0.15	±0.3	±0.4					
50 < L < 200	±0.15	±0.25	±0.5	±0.6	MATERIAL	REV.	A1		
200 < L	±0.2	±0.4	±0.5	±0.6					
DEG.	CHKD.	APPD.	⊕	UNIT	mm				
			SCALE	REF.					
				DWG NO.			PART NO.	ST-0017	